
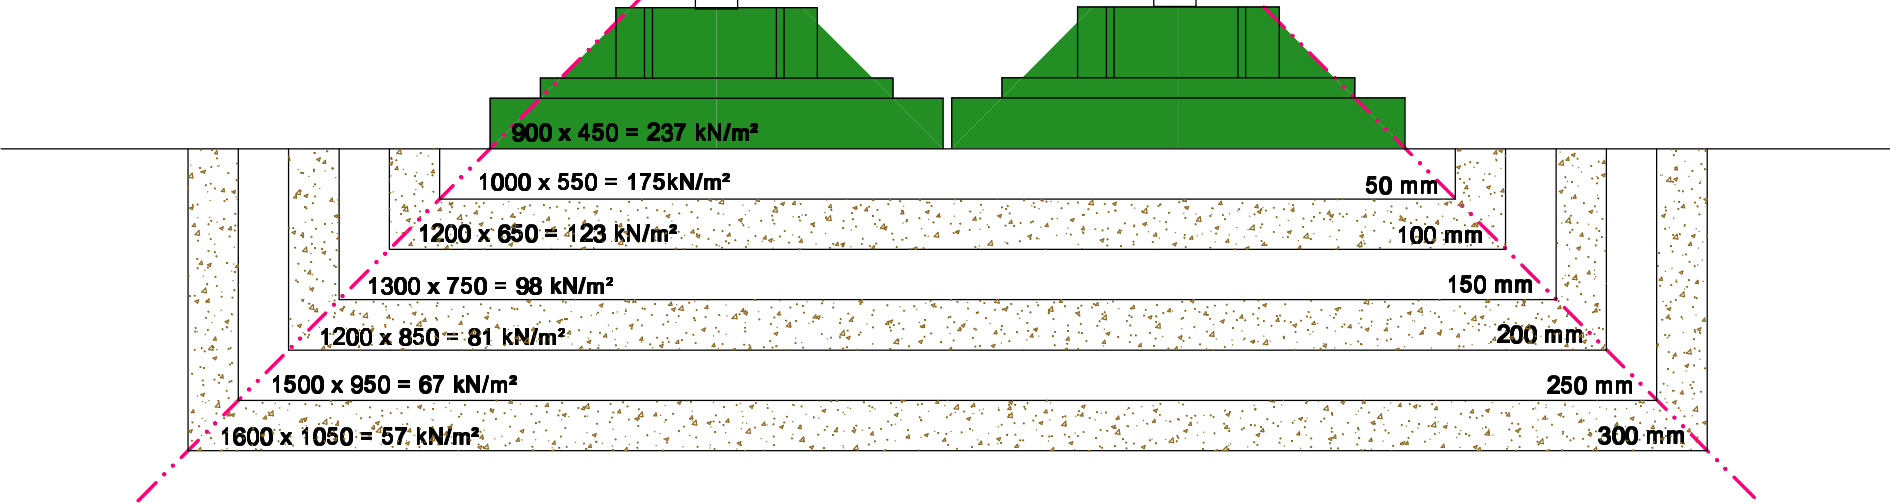



maximum safe working load

96 kN



Ground Bearing Capacity

Depth

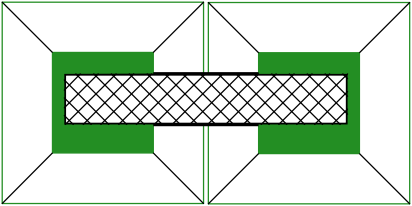

Double Jackpad Support

